Chelsea Wall Mounted Accessory Fitting Instructions

Thank you for purchasing this Croydex product. Please follow the fixing and care instructions to ensure that your accessory is fitted safely and that it retains its high quality finish. **Please retain this leaflet for future reference.**

Fixing Pack Contents
Long Fixing Screws x 2 (4) (Double Mounting)
Wall Plug X 2 (4) (Double Mounting)
Wall Fixing Bracket x 1 (2) (Double Mounting)



Contents supplied will vary depending on the product. The quantities shown above in brackets are for double bracket fixings.

NOTE - The wall plugs supplied are for solid walls only; use appropriate fixings for cavity walls

Tools Required

Drill	Pencil
6mm masonry drill bit	Spirit Level
6mm ceramic drill bit (optional)	Small flat head screwdriver
Cross head screwdriver	Tape measure

KEEP DIY TOOLS OUT OF THE REACH OF CHILDREN

Safety and Care Advice

1. Always take care when using an electric drill, particularly in the bathroom. Always check for hidden cables and pipework before drilling. Always use a residual current circuit breaker (RCCB) when using mains powered tools and take extreme care if there is any water in the working area.
2. Always wear suitable eye protection when drilling.
3. If the product is to be fitted on a ceramic tiled wall, a ceramic drill bit should be used. Do not drill mounting holes in the grouted area between tiles. Mask the area around the hole with tape before drilling to prevent damage to the tile.
4. Do not use the product as a grab bar.

Instruction for items with single and double mounting point:

1. Select position of product and mark its centre on wall. **(Refer to Fig. 1 for centre positions of double mounting items.)** Centre the wall fixing bracket over the mark and using it as a template mark the screw fixing positions on the wall surface.

2. Drill the holes to a depth of 40mm in the marked positions using a 6mm masonry drill. If the product is to be fitted onto a ceramic tiled wall, a ceramic drill bit should be used.
3. Insert the wall plugs flush to the surface of the wall. If fitting to a tiled surface, the wall plugs should be inserted below the surface of the tile to avoid cracking.
4. Insert the screws provided through the wall fixing bracket and screw into the wall. Ensuring the wall bracket is level.
5. Using a small flat head screwdriver loosen the grub screw within the backplate. Place the backplate on the wall bracket and tighten the grub screw as shown in figure 2.



Fig.1

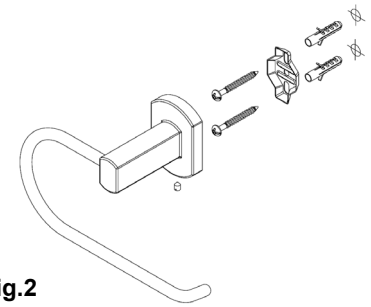
Fig.2

Additional Information

- Maximum safe working load for the shelf is 5kg. This load must be evenly distributed across the surface area of the shelf.
- The toilet roll holder has a clear film on the cover to protect it from damage whilst in transit. Please remove this film before use.

Product Care Advice

- To retain the best quality finish, clean product regularly with a soft damp cloth.
- Do not use abrasive or chemical cleaners, as these will damage the product.
- Do not place hot objects onto the surface of the glass.
- Do not position glass components in close contact with a heat source.

Croydex Limited, Central Way, Andover, Hants, SP10 5AW, UK
Tel: +44 (0) 1264 365881. Fax: +44 (0) 1264 356437
Website: www.croydex.co.uk. E-mail: info@croydex.co.uk